

SpeedFlex™

1/4 Turn Stop Valves

Eastman stop valves are designed to control water flow to household plumbing fixtures such as ice makers, faucets, dishwashers, and toilets. Composed of strong and sturdy brass and featuring a sleek chrome plated finish, this water line shutoff valve protects against corrosion, and provides a watertight seal. Each shut off valve features a brass ball mechanism with a removable handle for ease of use.

Applications

Eliminates the need to turn off the water supply to the entire home when maintenance and repair is required.

Specification Data

Materials

Valve Body	Brass
Sealing Ring	Teflon
Ball	Brass
O Ring	Rubber
Bonnet	Brass
Stem	Brass
O Ring	Rubber
Screw	Steel
Handle	Zinc Alloy
3/8" Comp. Sleeve	Brass
3/8" Comp. Nut	Brass

Performance

Max Working Pressure

Max Pressure 125 psi

Max Temperature 140°F (60°C)

Flow Rate

1/4" Compression 2.2 GPM at 20 psi

3/8" Compression 4.0 GPM at 20 psi

Certifications & Listings


 ASME 112.18.1 CSA B125.1
 NSF/ANSI/CAN 372
 NSF/ANSI/CAN 61Q > 0.5


5-YEAR
 WARRANTY

For listing information, please contact Customer Service

AN RWC BRAND

RWC

US 1-800-486-5256 | eastmanplumbing.com

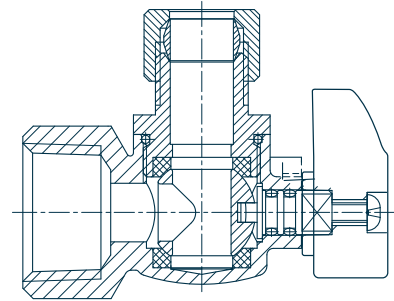

Dimensions (Inches)

Part #	Size	Type
Iron Pipe Inlet		
10731LF	3/8" FIP x 3/8" OD	Angle
10732LF	1/2" FIP x 1/4" OD	Angle
10733LF	1/2" FIP x 3/8" OD	Angle
10735LF	1/2" FIP x 1/2" OR 7/16" Slip Joint	Angle
10754LF	3/8" FIP x 3/8" OD	Straight
10755LF	1/2" FIP x 3/8" OD	Straight
48651LF	1/2" FIP x 3/8" OD x 3/8" OD	Dual Outlet
48655LF	1/2" FIP x 3/8" OD x 1/4" OD	Dual Outlet
10758	1/2" MIP OR SWEAT X 3/4" MHT Washing Machine - Hot	Angle
10759	1/2" MIP OR SWEAT X 3/4" MHT Washing Machine - Cold	Angle
Compression Inlet		
10737LF	5/8" OD (1/2" Nom.) x 1/4" OD	Angle
10753LF	5/8" OD (1/2" Nom.) x 1/4" OD	Straight
10738LF	5/8" OD (1/2" Nom.) x 3/8" OD	Angle
10720LF	5/8" OD (1/2" Nom.) x 3/8" OD Less Nut and Sleeve	Angle
10722LF	5/8" OD (1/2" Nom.) x 3/8" OD Loose Key Stop	Angle
10739LF	5/8" OD (1/2" Nom.) x 1/2" OD	Angle
10740LF	5/8" OD (1/2" Nom.) x 1/2" OR 7/16" Slip Joint	Angle
10756LF	5/8" OD (1/2" Nom.) x 3/8" OD	Straight

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Rev 1.0 / 4-24-24

Page 1 of 1 En-US

SpeedFlex™

1/4 Turn Stop Valves

Eastman stop valves are designed to control water flow to household plumbing fixtures such as ice makers, faucets, dishwashers, and toilets. Composed of strong and sturdy brass and featuring a sleek chrome plated finish, this water line shutoff valve protects against corrosion, and provides a watertight seal. Each shut off valve features a brass ball mechanism with a removable handle for ease of use.

Applications

Eliminates the need to turn off the water supply to the entire home when maintenance and repair is required.

Specification Data

Materials	
Valve Body	Brass
Sealing Ring	Teflon
Ball	Brass
O Ring	Rubber
Bonnet	Brass
Stem	Brass
O Ring	Rubber
Screw	Steel
Handle	Zinc Alloy
3/8" Comp. Sleeve	Brass
3/8" Comp. Nut	Brass

Performance	
Max Working Pressure	
Max Pressure	125 psi
Max Temperature	140°F (60°C)
Flow Rate	
1/4" Compression	2.2 GPM at 20 psi
3/8" Compression	4.0 GPM at 20 psi

Certifications & Listings



ASME112.18.1 CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61Q > 0.5



For listing information, please contact Customer Service

AN RWC BRAND



US 1-800-486-5256 | eastmanplumbing.com

Dimensions (Inches)

Part #	Size	Type
Compression Inlet (Cont.)		
48652LF	3/8" OD X 3/8" OD x 5/8" OD (1/2" Nom.)	Dual Outlet
48654LF	3/8" OD X 1/4" OD x 5/8" OD (1/2" Nom.)	Dual Outlet
10790	12" Toilet Install Kit	Angle
10791	12" Faucet Install Kit	Angle
25881LF	1/4" OD X 3/8" OD X 3/8" OD Add-An-Outlet Adapter	Dual Outlet
25882LF	3/8" OD X 3/8" OD X 3/8" OD Add-An-Outlet Adapter	Dual Outlet
CPVC Inlet		
10729LF	3/8" OD x 1/2" CPVC	Angle
10730LF	3/8" OD x 1/2" CPVC	Straight
PEX Inlet For Use With Pex Tubing - Crimp F1807		
10727LF	3/8" OD x 1/2" PEX	Angle
10728LF	3/8" OD x 1/2" PEX	Straight
10725LF	1/2" PEX x 1/2" PEX	Straight
10780LF	1/2" PEX x 1/2" PEX x 1/4" OD	Dual Outlet
For Use With PEX Tubing - Crimp F1960		
10724LF	3/8" OD x 1/2" PEX	Angle
10723LF	3/8" OD x 1/2" PEX	Straight
10719LF	1/2" PEX x 1/2" PEX	Angle
10718LF	1/2" PEX x 1/2" PEX	Straight
Sweat Inlet		
10736LF	3/8" OD x 1/2" Sweat	Angle
10757LF	3/8" OD x 1/2" Sweat	Straight
10742LF	3/8" OD x 1/2" Sweat	Angle
10746LF	3/8" OD x 1/2" Sweat - 5" Ext Tube	Straight
Press Inlet		
10760	1/2" PRESS X 3/8" OD	Angle
10761	1/2" PRESS X 3/8" OD	Straight
Repair Stop		
10734LF	3/8" OD x 3/8" Female Comp	Straight

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Rev 1.0 / 4-24-24

Page 1 of 1 En-US