


Steel-Flex™

Stainless Steel Braided Toilet Connectors

Eastman™ Steel-Flex™ Connectors allow users to connect a toilet to a water source with ease. Featuring a non-toxic PVC core, a clear vinyl outer shell and grade 304 braided stainless steel exterior designed to prevent kinking and crimping. Equipped with full flow brass barbs and nickel-plated solid brass hex nuts. The flexible braided stainless steel allows for easy installation in tight spaces.

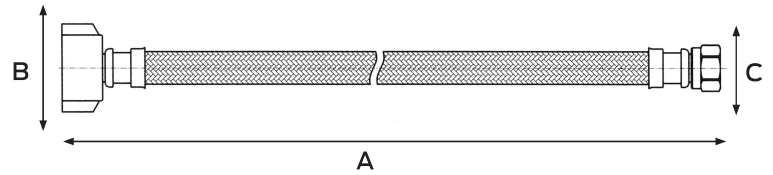

Applications

Connects residential or commercial toilet to water line.

Specification Data

Materials

Interior Tube	PVC
Exterior Tube	304 Stainless Steel
Ferrule	304 Stainless Steel
Nuts	Nickel-Plated Brass
Barbs	Brass
Washer	NBR

Performance

Max Working Pressure

Max Pressure	1500 psi
Working Pressure	20 to 125 psi
Working Temp	40°F-160°F

Certifications & Listings

ASME A112.18.6/CSA B125.6
NSF/ANSI/CAN 61: Q < 0.5
NSF/ANSI/CAN 372

For listing information, please contact Customer Service.

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Compression Inlet				
48087	7/8" B/C x 3/8" Comp	9"	7/8"	3/8"
48088	7/8" B/C x 3/8" Comp	12"	7/8"	3/8"
48089	7/8" B/C x 3/8" Comp	16"	7/8"	3/8"
48090	7/8" B/C x 3/8" Comp	20"	7/8"	3/8"
48092	7/8" B/C x 1/2" Comp	9"	7/8"	1/2"
48114	7/8" B/C x 1/2" Comp	12"	7/8"	1/2"
48094	7/8" B/C x 1/2" Comp	16"	7/8"	1/2"
48739	7/8" B/C x 7/16" Comp	12"	7/8"	7/16"
48741	7/8" B/C x 7/16" Comp	20"	7/8"	7/16"
FIP Inlet				
48083	7/8" B/C x 1/2" FIP	9"	7/8"	1/2"
48084	7/8" B/C x 1/2" FIP	12"	7/8"	1/2"
48085	7/8" B/C x 1/2" FIP	16"	7/8"	1/2"
48086	7/8" B/C x 1/2" FIP	20"	7/8"	1/2"
Flare Inlet				
48097	7/8" B/C x 3/8" Flare	12"	7/8"	3/8"
48118	7/8" B/C x 3/8" Flare	20"	7/8"	3/8"
48125	7/8" B/C x 1/2" Flare	12"	7/8"	1/2"
48119	7/8" B/C x 1/2" Flare	20"	7/8"	1/2"


Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Steel-Flex™

Stainless Steel Braided Toilet Connectors with Nylon Nuts

Eastman™ Steel-Flex™ Connectors allow users to connect a toilet to a water source with ease. Featuring a non-toxic PVC core, a clear vinyl outer shell and grade 304 braided stainless steel exterior designed to prevent kinking and crimping. Equipped with full flow brass barbs and nylon hex nuts. The flexible braided stainless steel allows for easy installation in tight spaces.

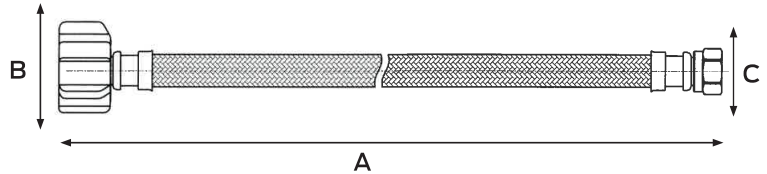

Applications

Connects residential or commercial toilet to water line.

Specification Data

Materials	
Interior Tube	PVC
Exterior Tube	304 Stainless Steel
Ferrule	304 Stainless Steel
Nuts	Nickel-Plated Brass/Nylon*
Barbs	Brass
Washer	NBR

Performance	
Max Working Pressure	
Max Pressure	1500 psi
Working Pressure	20 to 125 psi
Working Temp	40°F-160°F

Certifications & Listings

ASME A112.18.6/CSA B125.6
NSF/ANSI/CAN 61: Q < 0.5
NSF/ANSI/CAN 372


For listing information, please contact Customer Service.

Dimensions (Inches)				
Part #	Outlet x Inlet	A	B	C
Compression Inlet (Nylon*)				
48087P	7/8 NYL-BC X 3/8" COMP	9"	7/8"	3/8"
48088P	7/8 NYL-BC X 3/8" COMP	12"	7/8"	3/8"
48089P	7/8 NYL-BC X 3/8" COMP	16"	7/8"	3/8"
48090P	7/8 NYL-BC X 3/8" COMP	20"	7/8"	3/8"
48083P	7/8 NYL-BC x 1/2" IPS	9"	7/8"	1/2"
48084P	7/8 NYL-BC x 1/2" IPS	12"	7/8"	1/2"
48085P	7/8 NYL-BC x 1/2" IPS	16"	7/8"	1/2"
48086P	7/8 NYL-BC x 1/2" IPS	20"	7/8"	1/2"

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Flexible Reinforced PVC Toilet Connectors

Eastman™ Reinforced PVC Connectors allow users to connect a toilet to a water source with ease. Featuring a non-toxic PVC core, and a clear vinyl outer shell designed to prevent kinking and crimping. Equipped with full flow brass barbs and nickel-plated solid brass hex nuts. The flexible reinforced PVC allows for easy installation in tight spaces.

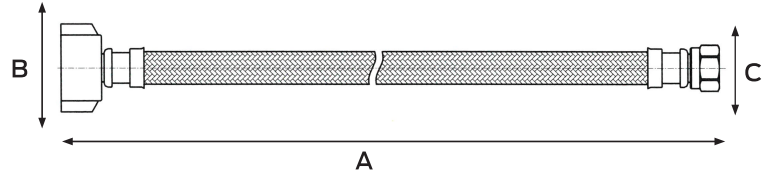

Applications

Connects residential or commercial toilet to water line.

Specification Data

Materials

Tube	PVC
Ferrule	304 Stainless Steel
Nuts	Nickel-Plated Brass
Barbs	Brass
Washer	NBR

Performance

Max Working Pressure

Max Pressure	1500 psi
Working Pressure	20 to 125 psi
Working Temp	40°F-160°F

Certifications & Listings

ASME A112.18.6/CSA B125.6
NSF/ANSI/CAN 61: Q < 0.5
NSF/ANSI/CAN 372

For listing information, please contact Customer Service.

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Compression Inlet				
48978	7/8" B/C x 3/8" Comp	9"	7/8"	3/8"
48145	7/8" B/C x 3/8" Comp	12"	7/8"	3/8"
48170	7/8" B/C x 3/8" Comp	16"	7/8"	3/8"
48175	7/8" B/C x 3/8" Comp	20"	7/8"	3/8"
48179	7/8" B/C x 1/2" Comp	12"	7/8"	1/2"
FIP Inlet				
48169	7/8" B/C x 1/2" FIP	9"	7/8"	1/2"
48958	7/8" B/C x 1/2" FIP	12"	7/8"	1/2"
48959	7/8" B/C x 1/2" FIP	16"	7/8"	1/2"
48960	7/8" B/C x 1/2" FIP	20"	7/8"	1/2"
Flare Inlet				
48183	7/8" B/C x 3/8" Flare	12"	7/8"	3/8"
48722	7/8" B/C x 3/8" Flare	20"	7/8"	3/8"
48973	7/8" B/C x 1/2" Flare	12"	7/8"	1/2"
48972	7/8" B/C x 1/2" Flare	20"	7/8"	1/2"

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	