

Steel-Flex™

Stainless Steel Braided Washing Machine Connectors

Eastman™ Steel-Flex™ Connectors allow users to connect a washing machine to a water source with ease. Featuring a non-toxic PVC core, a clear vinyl outer shell and grade 304 braided stainless steel exterior designed to prevent kinking and crimping. Equipped with full flow brass barbs and 304 stainless steel nuts. The flexible braided stainless steel allows for easy installation in tight spaces.

Applications

Connects residential or commercial washing machines to a water line.

Specification Data

Materials

Interior Tube	PVC
Tube Size	3/8" ID x 5/8" OD
Exterior Tube	304 Stainless Steel
Ferrule	304 Stainless Steel
Nuts	304 Stainless Steel
Barbs	Brass
Washer	NBR


Performance

Max Working Pressure	
Max Burst Pressure	1500 psi
Working Pressure	20 to 125 psi
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.

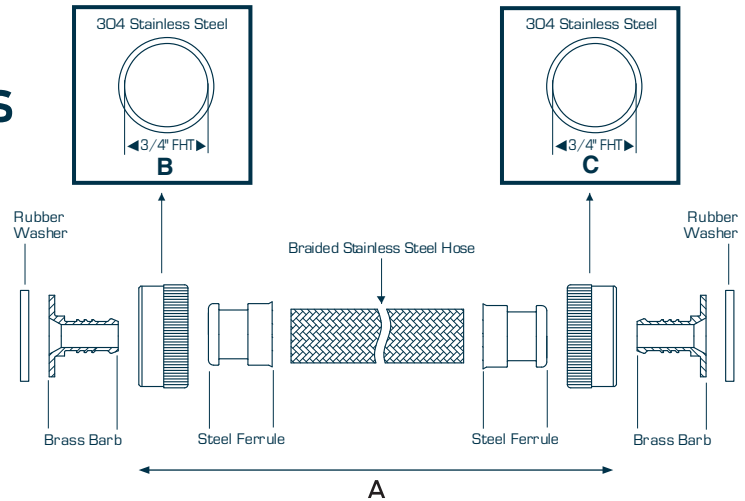

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Stainless Steel Washing Machine Hose -Single				
48369	3/4" FHT x 3/4" FHT	6'	3/4"	3/4"
41019	3/4" FHT x 3/4" FHT	8'	3/4"	3/4"
48640	3/4" FHT x 3/4" FHT	10'	3/4"	3/4"
41026	3/4" FHT x 3/4" FHT	4'	3/4"	3/4"
41027	3/4" FHT x 3/4" FHT	5'	3/4"	3/4"
Stainless Steel Washing Machine Hose -1 Pair				
48370	3/4" FHT x 3/4" FHT	4' Pair	3/4"	3/4"
48372	3/4" FHT x 3/4" FHT	6' Pair	3/4"	3/4"
41063	3/4" FHT x 3/4" FHT	5' Pair	3/4"	3/4"
Red/Blue Stainless Steel Washing Machine Hose - 1 Pair				
98506	3/4" FHT x 3/4" FHT	6' Pair	3/4"	3/4"

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Steel-Flex™ Stainless Steel Braided Washing Machine Connectors

Eastman™ Steel-Flex™ Connectors allow users to connect a washing machine to a water source with ease. Featuring a non-toxic PVC core, a clear vinyl outer shell and grade 304 braided stainless steel exterior designed to prevent kinking and crimping. Equipped with full flow brass barbs and 304 stainless steel nuts. The flexible braided stainless steel allows for easy installation in tight spaces.

Applications

Connects residential or commercial washing machines to a water line.

Specification Data


Materials	
Interior Tube	PVC
Tube Size	3/8" ID x 5/8" OD
Exterior Tube	304 Stainless Steel
Ferrule	304 Stainless Steel
Nuts	304 Stainless Steel
Barbs	Brass
Washer	NBR

Performance	
Max Working Pressure	
Max Burst Pressure	1500 psi
Working Pressure	20 to 125 psi
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.

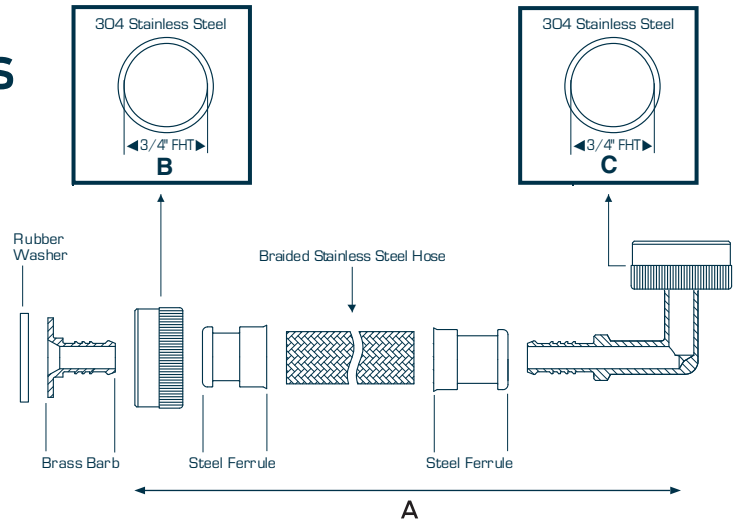


Dimensions (Inches)				
Part #	Outlet x Inlet	A	B	C
Stainless Steel Washing Machine Hose with 90° Elbow - Single				
48373	3/4" FHT x 3/4" FHT	4'	3/4"	3/4"
48374	3/4" FHT x 3/4" FHT	5'	3/4"	3/4"
48375	3/4" FHT x 3/4" FHT	6'	3/4"	3/4"
Stainless Steel Washing Machine Hose with 90° Elbow - 1 Pair				
48376	3/4" FHT x 3/4" FHT	4' Pair	3/4"	3/4"
41065	3/4" FHT x 3/4" FHT	5' Pair	3/4"	3/4"
41066	3/4" FHT x 3/4" FHT	6' Pair	3/4"	3/4"

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Steel-Flex™

High-flow Triple Reinforced PVC Wrapped Stainless Steel Braided Washing Machine Connectors

The Eastman™ Steel-Flex™ 6 ft. PVC-wrapped braided stainless steel washing machine connectors are high-efficiency to withstand maximum burst strength. They are built with a steel belted rubber core, and a PVC-wrapped grade 304 braided stainless steel exterior with 90° elbows. The brass nuts are heavy-duty, nickel-plated with stainless steel ferrules.

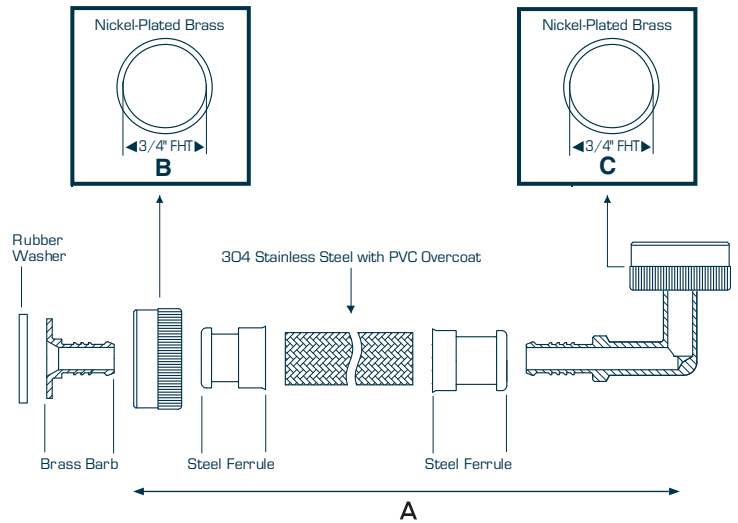

Applications

Connects residential or commercial washing machines to a water line.

Specification Data

Materials

Interior Tube	Steel Belted Rubber
Tube Size	1/2" ID x 3/4" OD
Exterior Tube	304 Stainless Steel
Ferrule	304 Stainless Steel
Nuts	Nickel-Plated Brass
Barbs	Brass
Washer	NBR

Performance

Max Working Pressure

Max Burst Pressure	1500 psi
Working Pressure Max	180 psi max
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.



US 1-800-486-5256 | eastmanplumbing.com

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Red/Blue High-Flow Stainless Steel Washing Machine Hose with 90° Elbow - 1 Pair				
98548	3/4" FHT x 3/4" FHT	6'	3/4"	3/4"

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

PVC Washing Machine Hose

Eastman™ hoses allow users to connect a washing machine to a water source with ease. Designed to prevent kinking and crimping. Equipped with full flow brass barbs and stainless steel nuts. The flexible PVC allows for easy installation in tight spaces. Engineered to outperform rubber hose.

Applications

Connects residential or commercial washing machines to a water line.

Specification Data

Materials

Tube	PVC
Tube Size	3/8" ID x 5/8" OD
Ferrule	304 Stainless Steel
Nuts	304 Stainless Steel
Barbs	Brass
Washer	NBR

Performance


Max Working Pressure

Max Burst Pressure	1200 psi
Working Pressure	20 to 125 psi
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.

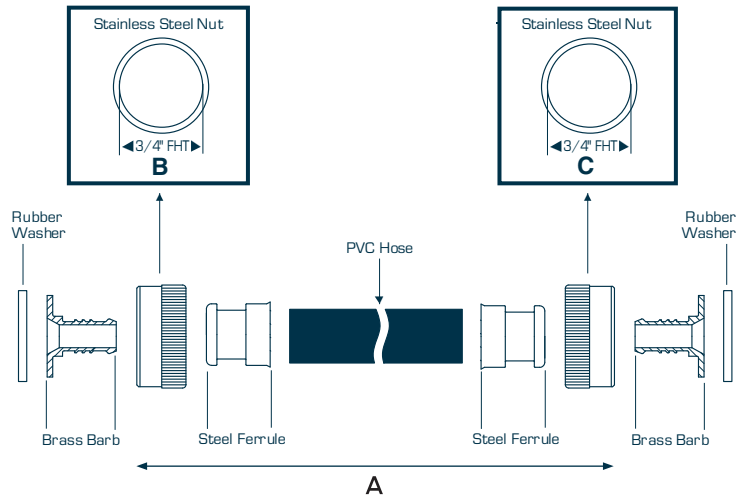

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Black PVC Washing Machine Hose -Single				
60321P	3/4" FHT x 3/4" FHT	4'	3/4"	3/4"
60323P	3/4" FHT x 3/4" FHT	5'	3/4"	3/4"
60325P	3/4" FHT x 3/4" FHT	6'	3/4"	3/4"
60327P	3/4" FHT x 3/4" FHT	8'	3/4"	3/4"
60329P	3/4" FHT x 3/4" FHT	10'	3/4"	3/4"
Black PVC Washing Machine Hose -1 Pair				
60322P	3/4" FHT x 3/4" FHT	4' Pair	3/4"	3/4"
60326P	3/4" FHT x 3/4" FHT	5' Pair	3/4"	3/4"
60320P	3/4" FHT x 3/4" FHT	6' Pair	3/4"	3/4"
60304P	3/4" FHT x 3/4" FHT	8' Pair	3/4"	3/4"
Red/Blue PVC Washing Machine Hose - 1 Pair				
60482P	3/4" FHT x 3/4" FHT	4' Pair	3/4"	3/4"
60484P	3/4" FHT x 3/4" FHT	5' Pair	3/4"	3/4"
60486P	3/4" FHT x 3/4" FHT	6' Pair	3/4"	3/4"

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

PVC Washing Machine Hose

Eastman™ hoses allow users to connect a washing machine to a water source with ease. Designed to prevent kinking and crimping. Equipped with full flow brass barbs and stainless steel nuts. The flexible PVC allows for easy installation in tight spaces. Engineered to outperform rubber hose.

Applications

Connects residential or commercial washing machines to a water line.

Specification Data

Materials

Tube	PVC
Tube Size	3/8" ID x 5/8" OD
Ferrule	304 Stainless Steel
Nuts	304 Stainless Steel
Barbs	Brass
Washer	NBR

Performance


Max Working Pressure

Max Burst Pressure	1200 psi
Working Pressure	20 to 125 psi
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.

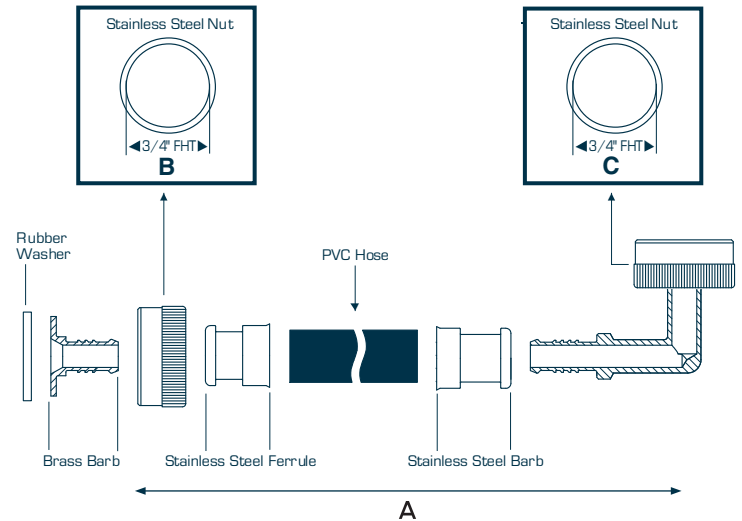

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Black PVC Washing Machine Hose with 90° Elbow - Single				
60331P	3/4" FHT x 3/4" FHT Elbow	4'	3/4"	3/4"
60333P	3/4" FHT x 3/4" FHT Elbow	5'	3/4"	3/4"
60335P	3/4" FHT x 3/4" FHT Elbow	6'	3/4"	3/4"
Black PVC Washing Machine Hose with 90° Elbow - 1 Pair				
60350P	3/4" FHT x 3/4" FHT Elbow	4' Pair	3/4"	3/4"
60308P	3/4" FHT x 3/4" FHT Elbow	5' Pair	3/4"	3/4"
60310P	3/4" FHT x 3/4" FHT Elbow	6' Pair	3/4"	3/4"
Red/Blue PVC Washing Machine Hose with 90° Elbow - 1 Pair				
60314P	3/4" FHT x 3/4" FHT Elbow	4' Pair	3/4"	3/4"
60315P	3/4" FHT x 3/4" FHT Elbow	5' Pair	3/4"	3/4"
60318P	3/4" FHT x 3/4" FHT Elbow	6' Pair	3/4"	3/4"

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

PVC Washing Machine Mixing Hose

Eastman™ PVC “Y” Hoses allow users to connect a washing machine to a water source when hot and cold water mixing is required. Designed to prevent kinking and crimping. Equipped with full flow brass barbs and stainless steel nuts. The flexible PVC allows for easy installation in tight spaces. Engineered to outperform rubber hose.

Applications

For use when hot and cold water mixing is required.

Specification Data

Materials

Tube	PVC
Tube Size	3/8" ID x 5/8" OD
Ferrule	304 Stainless Steel
FHT Nuts	304 Stainless Steel
MHT Nut	Brass
Barbs	Brass
Washer	NBR

Performance


Max Working Pressure

Max Working Pressure	180 psi
Working Pressure	20 to 125 psi
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.

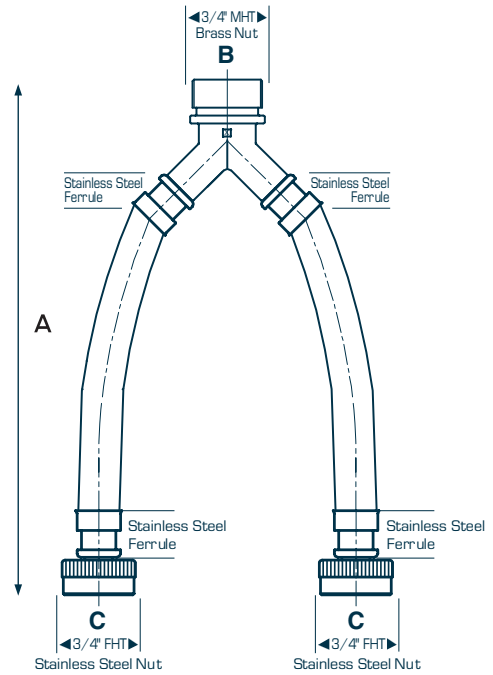

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Black PVC Washing Machine “Y” Hose				
98507	3/4" FHT x 3/4" FHT x 3/4" MHT	1'	3/4"	3/4"

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

PVC Utility/Dehumidifier Drain Hose

Eastman™ Drain Hoses allow users to connect a dehumidifier to a drain with ease. Designed to prevent kinking and crimping. Equipped with full flow brass barbs and stainless steel nuts. The flexible PVC allows for easy installation in tight spaces. Engineered to outperform rubber hose.

Applications

Connects dehumidifier to drain.

Specification Data

Materials

Tube	PVC
Tube Size	3/8" ID x 5/8" OD
Ferrule	304 Stainless Steel
Nuts	304 Stainless Steel
Barbs	Brass
Washer	NBR

Performance


Max Working Pressure

Max Working Pressure	180 psi
Working Pressure	20 to 125 psi
Working Temp	40° F - 160° F

Certifications & Listings

ASME A112.18.6/CSA B125.6

For listing information, please contact Customer Service.

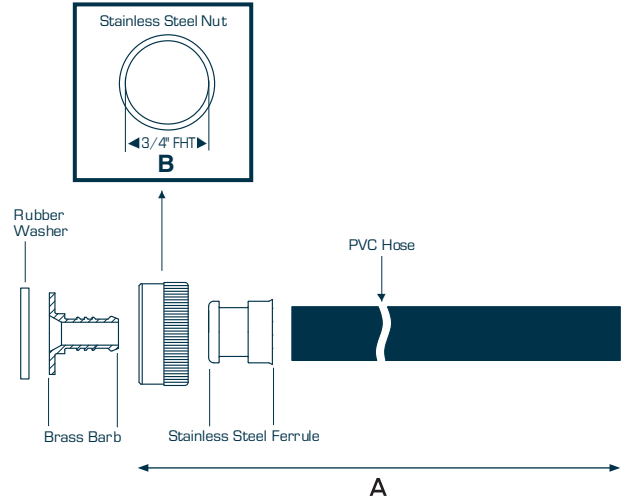

Dimensions (Inches)

Part #	Outlet x Inlet	A	B	C
Black PVC Utility/Dehumidifier Drain Hose				
60309P	3/4" FHT x 3/4" FHT	12'	3/4"	-

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	