


Mini Stainless Steel Expansion Tank

Provides maximum protection to the heat exchanger and piping system for on demand and POU water heaters with 2 gallons or less of total water volume. Relieves problems associated with excess pressure by absorbing any potential increase in pressure within the unit or piping system.

Applications

Prevents pressure fluctuations in water heater tanks

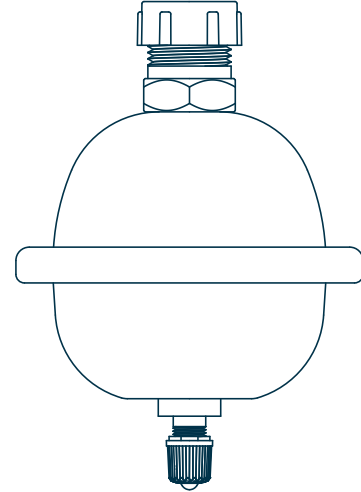

Specification Data

Materials	
Shell	304 Stainless Steel
Factory Pre-charge	40 psi
Water Connection Port	1/2" NPTM 304 stainless steel
Air Charging Port	Can be adjusted, and is serviceable
Surface Finishing	Stainless Steel

Dimensions (Inches)			
Part #	Connection	Diameter	Height
60008	1/2 in. MIP	8 in.	2.8 in.

Performance	
Max Working Pressure	
Max Pressure	150 psi
Max Temperature	210°F (98.9°C)

Certifications & Listings

UPC approved. Complies w/ NSF-61

For listing information, please contact Customer Service

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Rev 2.0 / 2-17-26
Page 1 of 1 En-US